




The "Standard" for Automatic Print & Apply Labelling Industrial High-Speed Printers

RFID Option

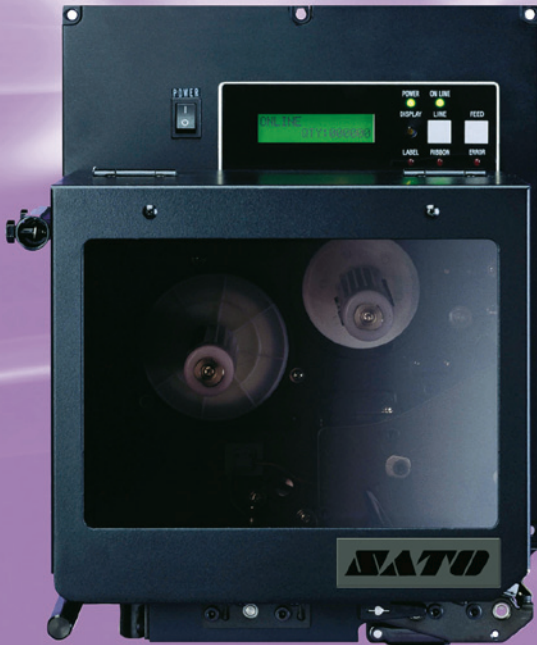

M84 Series

UNIQUE FEATURES

- Industry-leading Throughput for Wide-Web at 305dpi
- Interchangeable – For easy integration with previous SATO OEM print engines
- Host Interface Flexibility with Modular Interface Slots
- Modular design to provide seamless integration into various print-and-apply systems

INDUSTRY VERTICALS

- Manufacturing
- Logistics and Distribution
- Supply Chain

APPLICATIONS

- Compliance Labelling
- Warehouse Logistics
- Pallets Tracking
- Product Authentication
- Cross Docking
- Shipping Labels

High-speed throughput ▶

203/305 dpi ▶

4 inch print width ▶

Linerless Option ▶

Wide range of Interface Choices ▶

General Specifications

M8485Se/8490Se/8459Se/8460Se/8465Se



PRINTER MODEL		M8485Se	M8490Se	M8459Se	M8460Se	M8465Se
PRINTING SPECIFICATIONS						
Print Method	Thermal Transfer	Yes	Yes	-	Yes	Yes
	Direct Transfer	Yes	Yes	Yes	Yes	Yes
	Left Hand	Yes	Yes	Yes	Yes	Yes
	Right Hand	Yes	Yes	-	Yes	Yes
Print Resolution	8dots/mm (203dpi)	12dots/mm (305dpi)	8dots/mm (203dpi)	8dots/mm (203dpi)	12 dots/mm (305dpi)	
Max. Print Area	Width	128mm (5")	112mm (4.4")	112mm (4.4")	152mm (6")	152mm (6")
	Length	1249mm (49.2")	833mm (32.8")	1249mm (49.2")	1249mm (49.2")	833mm (32.8")
Print Speed	Up to 300mm/sec	Up to 200mm/sec	Up to 125mm/sec	Up to 200mm/sec	Up to 250mm/sec	

CONSUMABLES SPECIFICATIONS						
Sensor Type		Fixed reflective sensor for media with I-mark				Continuous and dispense for die-cut or continuous material
		Adjustable see-through sensor or die-cut media				
Media Type		Die-cut labels, plain paper facestock & synthetics				
Media Size	Width	25 ~ 134mm			53 ~ 165mm	53 ~ 165mm
	Length	Min 6mm				
	Thickness	0.10 ~ 0.18mm (dispense) 0.10 ~ 0.25mm (continuous)				
Ribbon	Max. Width	133mm	133mm	-	165mm	165mm (6.5")
	Max. Length	600m	600m	-	600m	600m (1968")
	Winding direction	Face-in	Face-in	-	Face-in	Face-in

FONT/BARCODE SYMBOLOGIES						
Font	Internal	Bitmap - 12 proportional, mono-spaced and outline fonts. Internal CGTriumvirate & CGTimes fonts scalable from 2 – 99 points. Optional download TrueType fonts				
1D Barcode	UPC-A/E, CODE 128, UCC/EAN 128, Interleaved 2/5, Industrial 2/5, Matrix 2/5, MSI, BookLand, POSTNET, RSS-14, EAN 8, EAN13, Code 93, Codabar					
2D Barcode	QR Code, PDF417, Maxi Code, Data Matrix, Composite symbol					

INTERFACE CHARACTERISTICS						
Processor	32-bit RISC					
Optional Interface	RS232C, IEEE1284, Centronics, LAN, Wireless LAN, USB, RS422/485					
Memory	2MB standard flash					

OPERATING CHARACTERISTICS						
Power Requirements	115V/220V, 50/60 Hz					
Environment	Operating	41° to 104°F (5° to 40°C) 15-85% RH, non-condensing				
	Storage	23° to 140°F (-5° to 60°C) Max. 90% RH, non-condensing				
Agency Certificates	CE, UL, CSA, TÜV, FCC Class B					
Physical Dimensions, weight	245 (W) x 408 (D) x 300 (H)mm, 11.5kg			245 (W) x 443 (D) x 300 (H)mm, 12.5kg	245 (W) x 443 (D) x 300 (H)mm, 12.5kg	

ACCESSORIES & OPTIONS						
Memory expansion up to 4MB, RFID Kit (UHF, HF), Standard Real Time Clock						

Contact For more information about SATO around the globe, visit www.satoworldwide.com

AMERICAS

10350A Nations Ford Road Charlotte, NC 28273
Tel: (704) 644-1650
Fax: (704) 644-1662
E: satosales@satoamerica.com

ASIA PACIFIC & OCEANIA

438B, Alexandra Road, #09-01/02, Alexandra Technopark Singapore 119968
Tel: (65) 6271-5300
Fax: (65) 6273-6011
E: sales@satoasiapacific.com

EUROPE

Lambroekstraat 5A, 1831 Diegem, Belgium
Tel: (32) 2 719 03 90
Fax: (32) 2 719 03 99
E: info@be.satoeurope.com

For sales & general enquiries: sales@satogbs.com or visit www.satoworldwide.com/contact